

DATA SHEET


Battery fuse protection

enwitec article no.	10011587
Customer article no.	BMZ no. 30340
Designation	enwitec BAT BREAKER-Spec.BMZ-EU-2xAccu-1xCharger
Application	Battery fuse "BAT BREAKER" for the PV energy storage system with battery charger / inverter
Number and type of battery charger / inverter:	max. 1 Sunny Island except SI 8.0 in off-grid mode
Number and type of energy storage:	max. 2 x BMZ
General note:	If a different battery charger / inverter is to be used, the suitability of the circuit breaker used (nominal value, tripping characteristic) must be checked by BMZ. Cable lugs are not included.

Min. construction distances:

Up and down min.:
300 mm
Left and right min.:
200 mm
forward min.:
800 mm

Cable clamping:
Must be done on site!

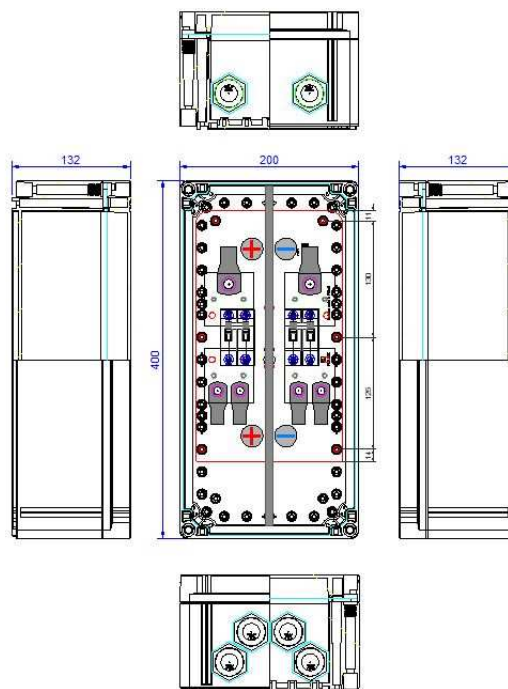

Delivery			
Designation	Article no.	Piece	Comments
Cable gland M32x1,5	10008647	6	
Locknut M32x1,5	10000724	6	
Twisting Sleeve M32*1,5	10008835	2	

