DATA SHEET

enwitec electronic

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

Art.Nr. 10015613

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | **3PH_FRO_BBDAP_20KW_3PH**

Type designation	Switchover Box for Fronius SYMO GEN24 Plus - all-pole - Standard
Application	Fronius SYMO GEN24 Plus System „Full Backup“
Region	Germany - Switzerland
Battery inverter	Symo GEN24 Plus 6.0/8.0/10.0/12.0 SC
Monitoring & control	Fronius Smart Meter TS65A-3 „Touchscreen“ is integrated
Grid structure	3PH 230/400 V - TT oder TN-S system, **NO** TN-C in customer's!

All values in [mm]
Dimensions „blue“
Fastening points „orange“

Inner construction as well as choice of components may differ within the variants!

Minimum distances

top	200
bottom	400
lateral	200
front	1200

variant **VAR1**

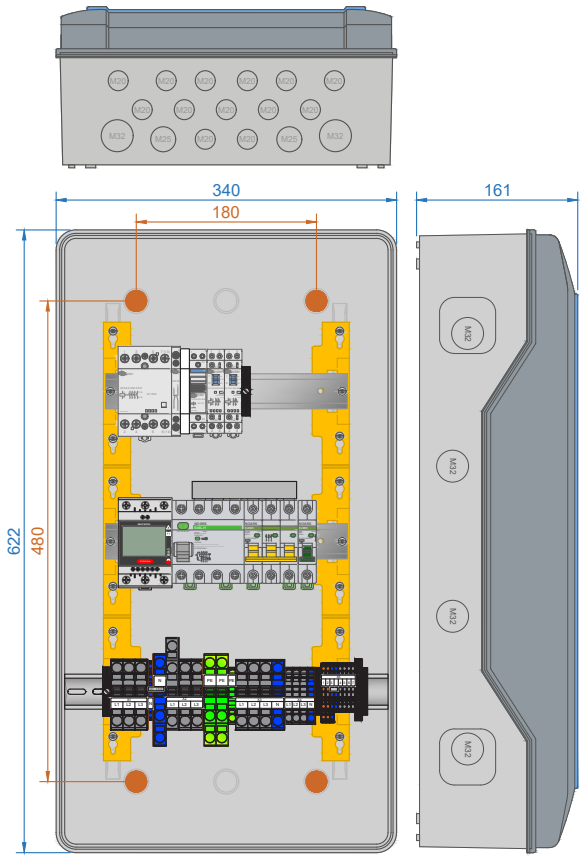

variant **VAR2**

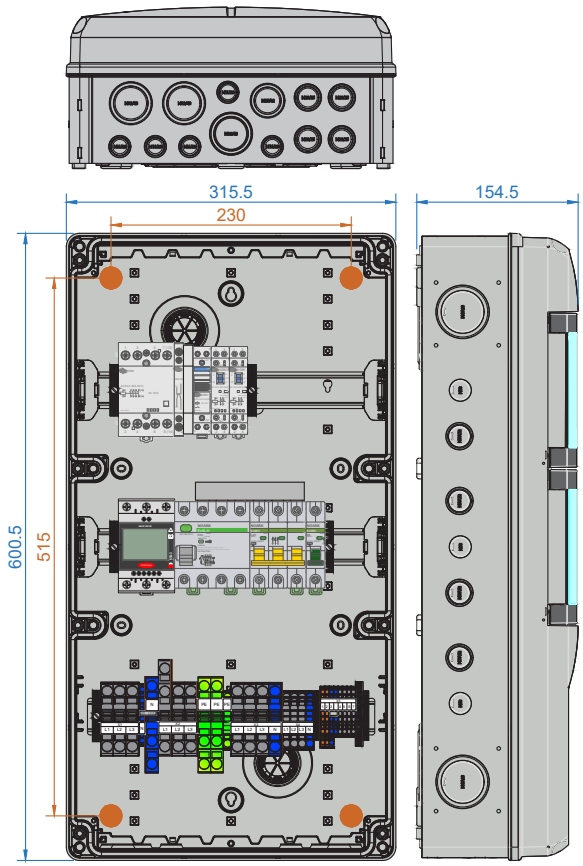

SCOPE OF DELIVERY

Quantity	Designation	Quantity	Designation
1	Switchover Box 10015613 - VAR1 or VAR2	2	Locknut M25
3	Cable gland M40 x 1,5	2	Locknut M20
4	Cable gland M32 x 1,5	1	Set protective cover for Fronius Smart Meter
2	Cable gland M20 x 1,5	1	Set cover caps for fastening screws
2	Enlargement adaptor from M32 to M40 (only VAR1)	1	Warning label „dangerous voltage“
2	Enlargement adaptor from M25 to M32 (only VAR1)	1	Fronius label „Backup power“
3	Locknut M40	1	Operating instructions Fronius Smart Meter
4	Locknut M32	1	Installation instructions

Status: (a)

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

INTERCONNECTION ENVIRONMENT - SYMO GEN24 PLUS

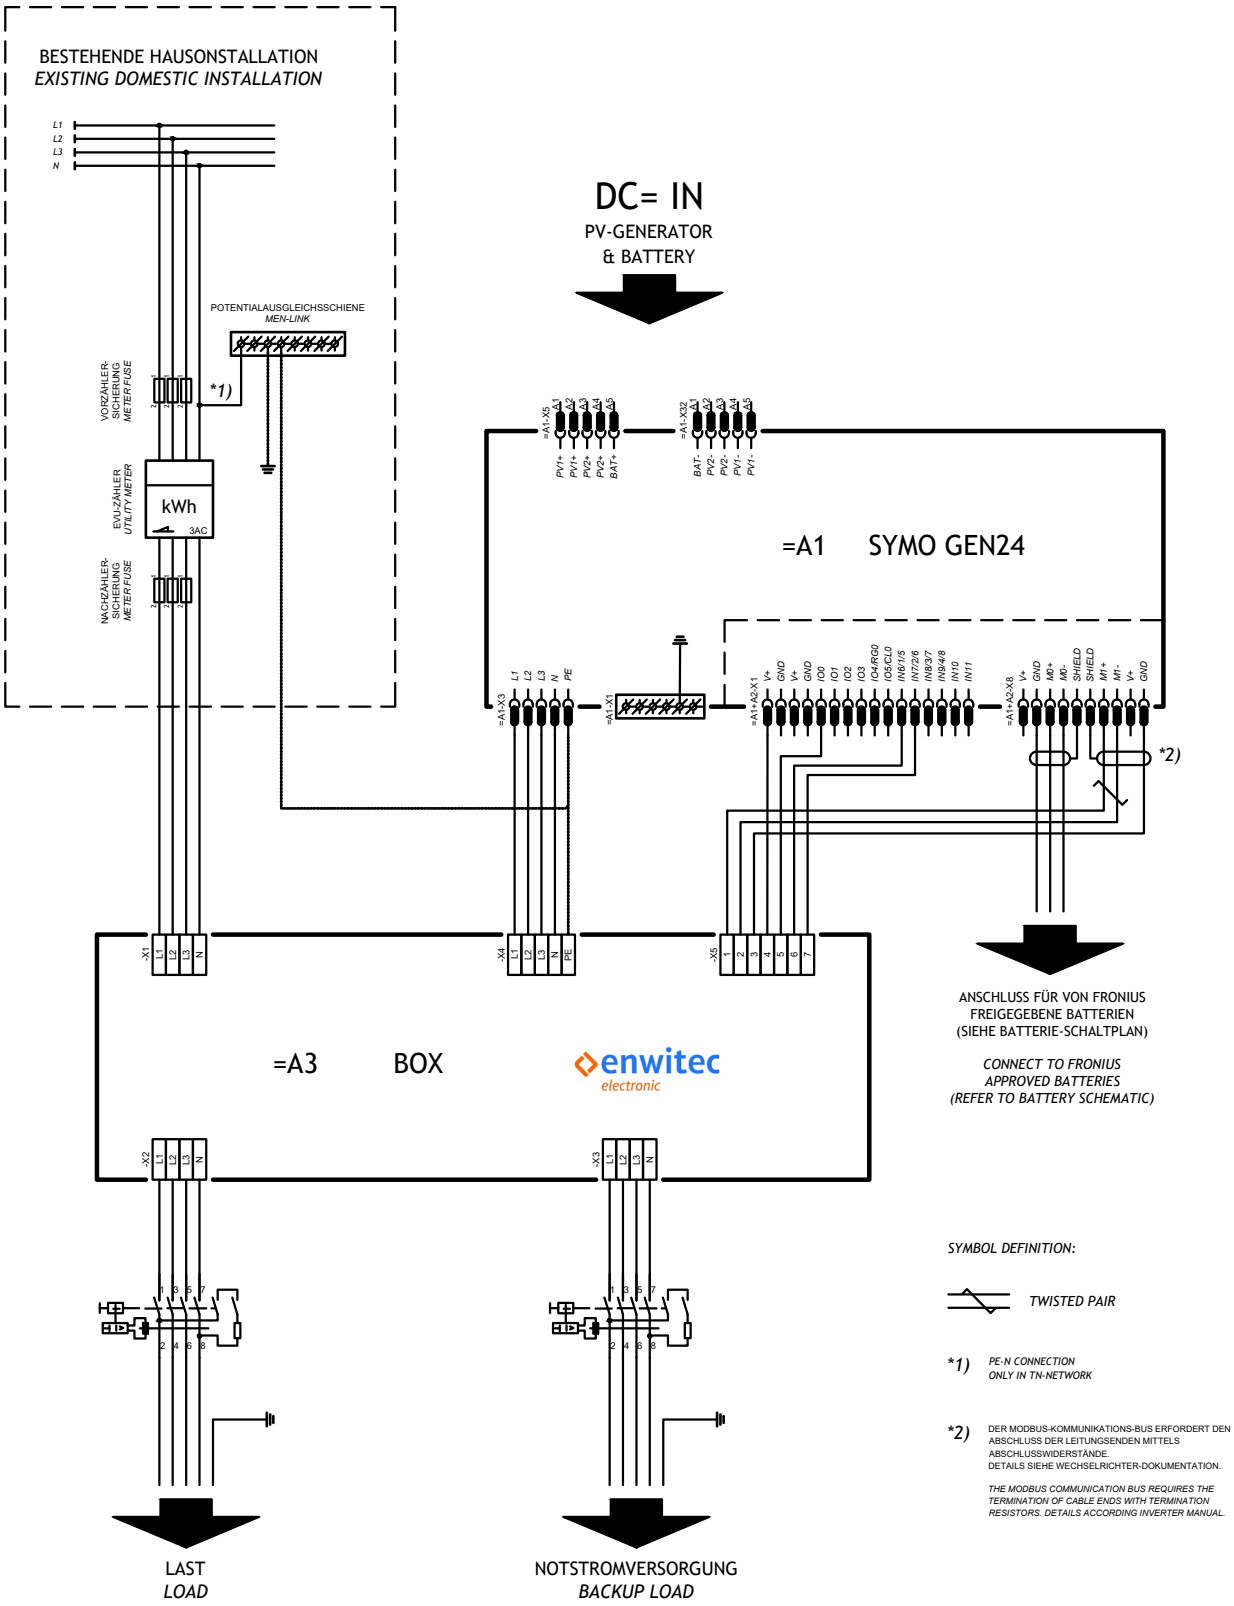

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

Art.Nr. 10015613

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | **3PH_FRO_BBDAP_20KW_3PH**

INTERNAL CIRCUITRY

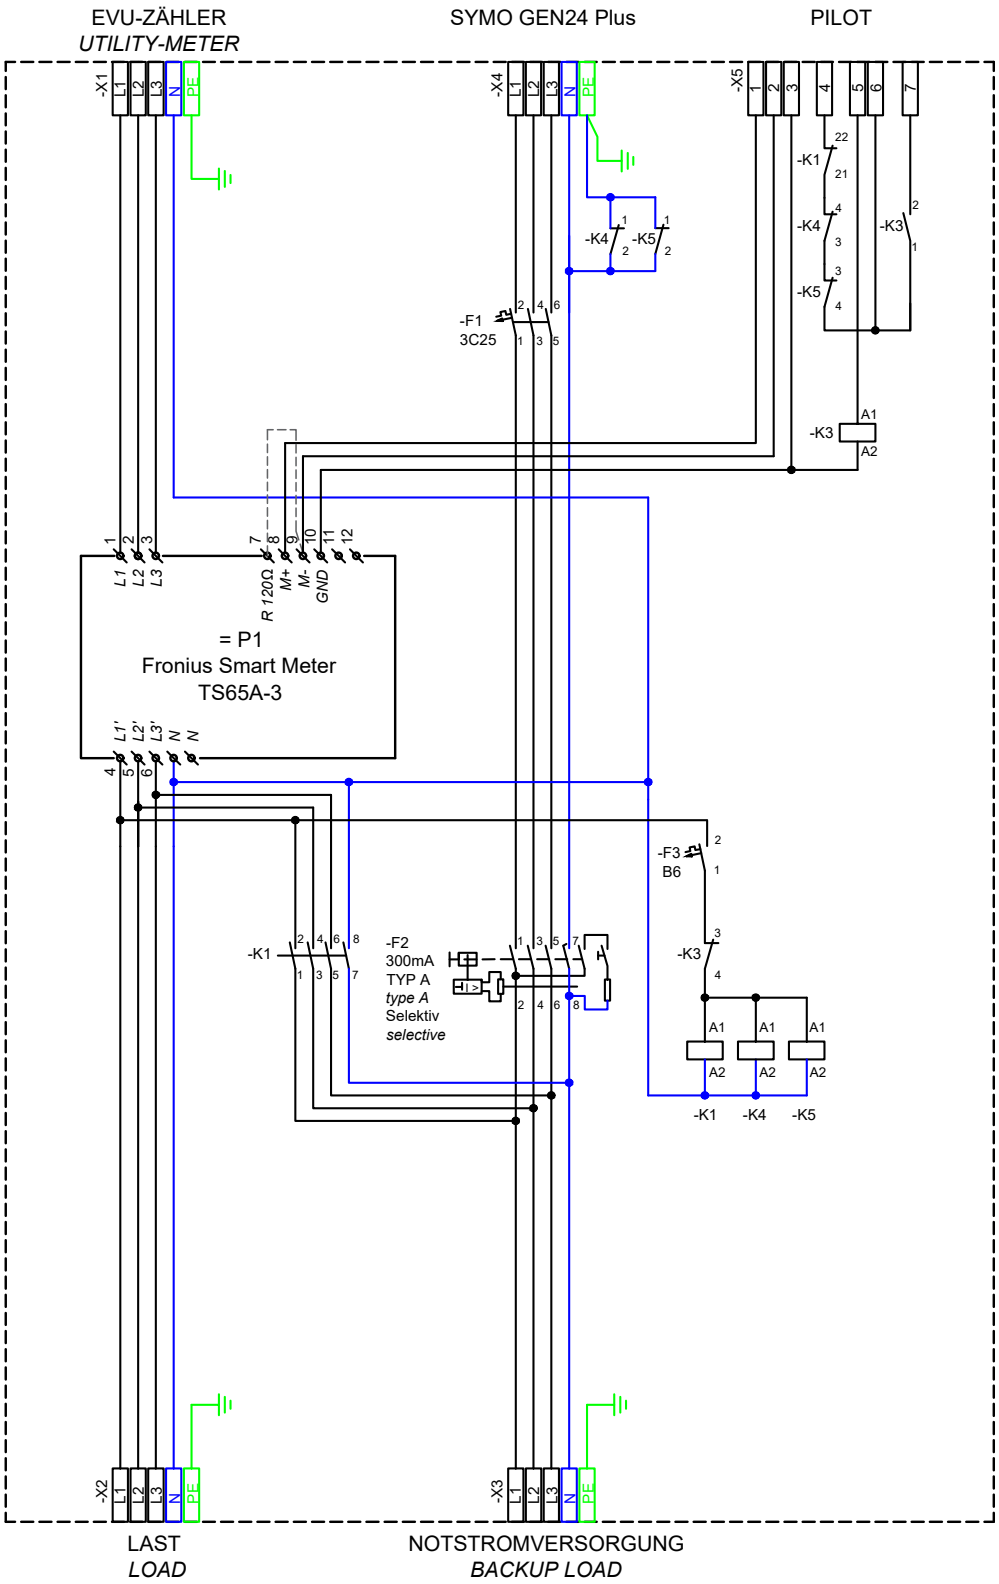

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

enwitec electronic

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

CABLE ENTRY

Enclosure variant **VAR1**

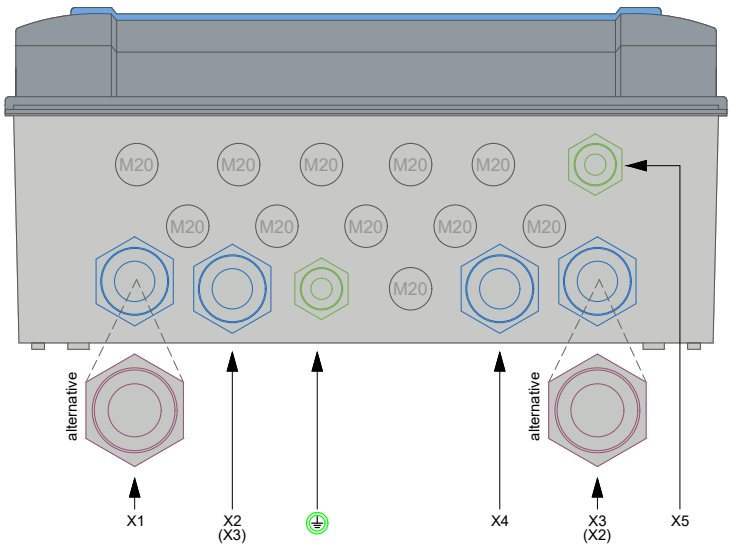

Enclosure variant **VAR2**

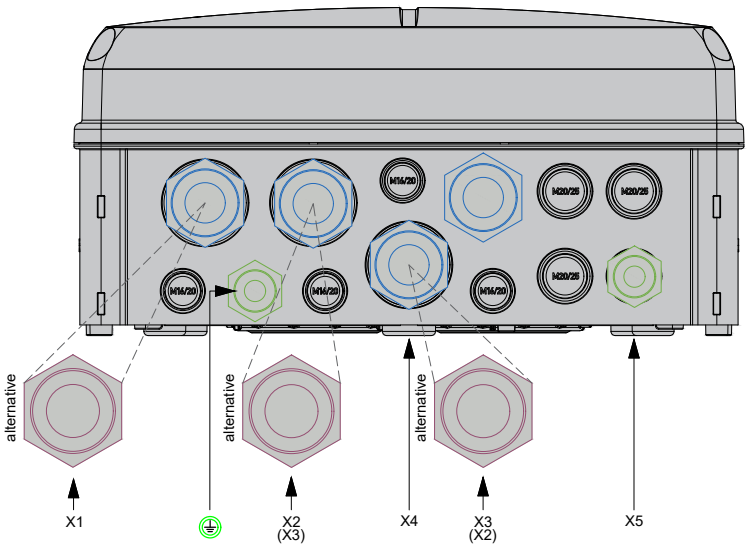

Cable gland	Terminal block	Clamping range [mm]	Wire type	Cross section [mm²]	Stripping length [mm]
M32 M40	X1 – Grid	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32 M40	X2 – Load „Standard“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32 M40	X3 – Load „Backup“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32	X4 – Symo GEN24 Plus	19 - 25	solid /stranded fine stranded fine stranded + wire end ferrule	10 10 6	13 - 15
M20	X5 – Data cable	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	2,5 2,5 1,5	10 - 12
M20	PE – equipotential bonding rail	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

enwitec electronic

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

GENERAL DATA

NOMINAL VALUES			• applicable / - not applicable
Rated voltage		[V]	3PH - 230/400
Rated insulation voltage		[V]	400
Operating frequency		[Hz]	50/60 +/- 5%
Max. prospective* short circuit current		[kA]	10
Permitted grid structure			TT/TN-S
Grid disconnection			all-pole
Max. grid-side packup fuse (gL/gG)		[A]	63
Max. thermal throughput power	ta = 40°C ta = 25°C	[kW]	20 30#
Standby-loss, ca.		[W]	9

CIRCUIT BREAKERS			
F1	Symo GEN24 Plus	MCB [A]	3C25
F2	Symo GEN24 Plus	RCD [A]	type A - selectiv 63/0,3
F3	Control circuit „Grid“	MCB [A]	B6

CONTACTORS (IEC/EN 61095; IEC/EN60947-1; IEC 60947-5-1)			
K1	Grid disconnection	AC1 [A]	63
K4/K5	Earthing device	AC1 [A]	25
K3	Communication	[VDC]	20
K1/K4/K5	Control voltage	[VDC]	230
K3	Control voltage	[VDC]	12
Hum-free		•/-	•

ENERGY METER	
Manufacturer	Fronius
Type	TS65A-3

* Is the maximum, unaffected continuous short-circuit current of the mains connection.

\# When operating the switchover box with 30KW max. thermal throughput power, the use of 2 x ventilation valves is required (diagonal air flow – positioning bottom left and top right e.g.; knockouts are available)
Protection class is being reduced to IP44.

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

DATA SHEET

enwitec electronic

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

Art.Nr. 10015613

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | **3PH_FRO_BBDAP_20KW_3PH**

TECNICAL DATA

GENERAL DATA		• zutreffend / - nicht zutreffend
Dimensions W x H x D VAR1 (without cable glands)	[mm]	340 x 622 x 161
Dimensions W x H x D VAR2 (without cable glands)	[mm]	315 x 600 x 155
Weight, ca.	[kg]	11
Operating temperature range t_a	[°C]	-5...+40
Temperature - transport/storage (24 h. 70°C)	[°C]	-25...+55
Humidity - condensing allowed	•/-	-
Humidity - permitted range	[%]	5...95
Max. altitude above sea level N.N.	[m]	2000
Protection class IP (EN 60529) ta = 40°C ta = 25°C	IP	65 44#
outdoor-application permitted	•/-	-
Installation type		indoor
Protection against electric shock (EN 61140)		II
Case material		polycarbonate
RoHS-conformity (2011/65/EU)	•/-	•
Case colour		similar RAL 7035
Cover		transparent
Mounting method		wall mounting
Locking system		without tool

MISCELLANEOUS	
Customs tariff number	85371098

ACCESSORY (not included in scope of delivery)	
# Set of ventilation valves – order number Consisting of: 2 x Ventilation valve – order number 2 x Reduction adaptor 2 x Locknut	10017652 (enwitec) 036579 (LeGrand) M40/M32 M40

When operating the switchover box with 30KW max. thermal throughput power, the use of 2 x ventilation valves is required (diagonal air flow – positioning bottom left and top right e.g.; knockouts are available)
Protection class is being reduced to IP44.

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

enwitec electronic

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

EC DECLARATION OF CONFORMITY

The product,	designation:	**3PH_FRO_BBDAP_20KW_3PH**
	variants:	**VAR1/VAR2**
	article number:	**10015613**
	manufacturer:	**enwitec electronic GmbH** **Scherrwies 2** **84329 Rogglfing**
	description:	**Switchover Box for Fronius system Symo GEN24 Plus - „Full Backup“**

to which this declaration relates, is in conformity to the following standards or normative documents:

EN 61439-1	**Low-voltage switchgear and controlgear assemblies**
EN 61439-2	**Power switchgear and controlgear assemblies**
EN 61439-3	**Distribution boards intended to be operated by Ordinary persons (DBO)**

and is in accordance with the provisions of the following EC-directives:

Low-voltage directive 2014/35/EU

Restriction of Hazardous Substances Directive 2011/65/EU (RoHS)

Year of affi xing CE-marking: **2021**

Date of issue: **17.11.2020**

enwitec electronic GmbH

Name / Signature

Johann Wimmer
CEO

The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite carefus editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH