

Art.Nr. 10017349

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
 Scherrwies 2 | 84329 Wurmanssquick
 Mail info@enwitec.eu
www.enwitec.eu

Type designation	Switchover Box for Fronius SYMO GEN24 Plus - three-pole - Standard incl. FRT
Application	Fronius SYMO GEN24 Plus System „Full Backup“
Region	Austria
Battery inverter	Symo GEN24 6.0 Plus/8.0 Plus/10.0 Plus
Monitoring & control	Fronius Smart Meter TS65A-3 „Touchscreen“ is integrated
Grid structure	3PH 230/400 V - TN-S system (TT system in consultation with grid operator!), NO TN-C in customer's system!

All values in [mm]

Dimensions


Fastening points

„blue“
 „orange“

Inner construction as well as choice of components may differ within the variants!

Minimum distances

top	200
bottom	400
lateral	200
front	1200

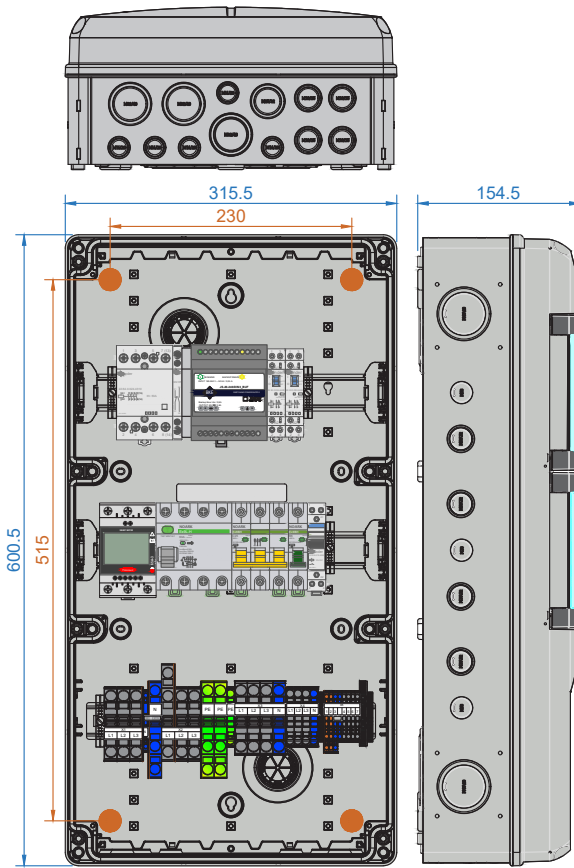

SCOPE OF DELIVERY

Quantity	Designation	Quantity	Designation
1	Switchover Box 10017349	1	Set cover caps (grommets) for fastening screws
3	Cable gland M40 x 1,5	1	Set protective cover for Fronius Smart Meter
4	Cable gland M32 x 1,5	1	Warning label „dangerous voltage“
2	Cable gland M20 x 1,5	1	Fronius label „Backup power“
3	Locknut M40	1	Operating instructions Fronius Smart Meter
4	Locknut M32	1	Installation instructions
2	Locknut M20		

Status: June 2023

10017349_datasheet_3PH_FRO_BBDAP_20KW_3PH_FRT_2024_05_17


The text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite careful editing, all information is without guarantee. Liability is excluded. ©enwitec electronic GmbH

Art.Nr. 10017349


SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmansquick
Mail info@enwitec.eu
www.enwitec.eu

INTERCONNECTION ENVIRONMENT - SYMO GEN24 PLUS

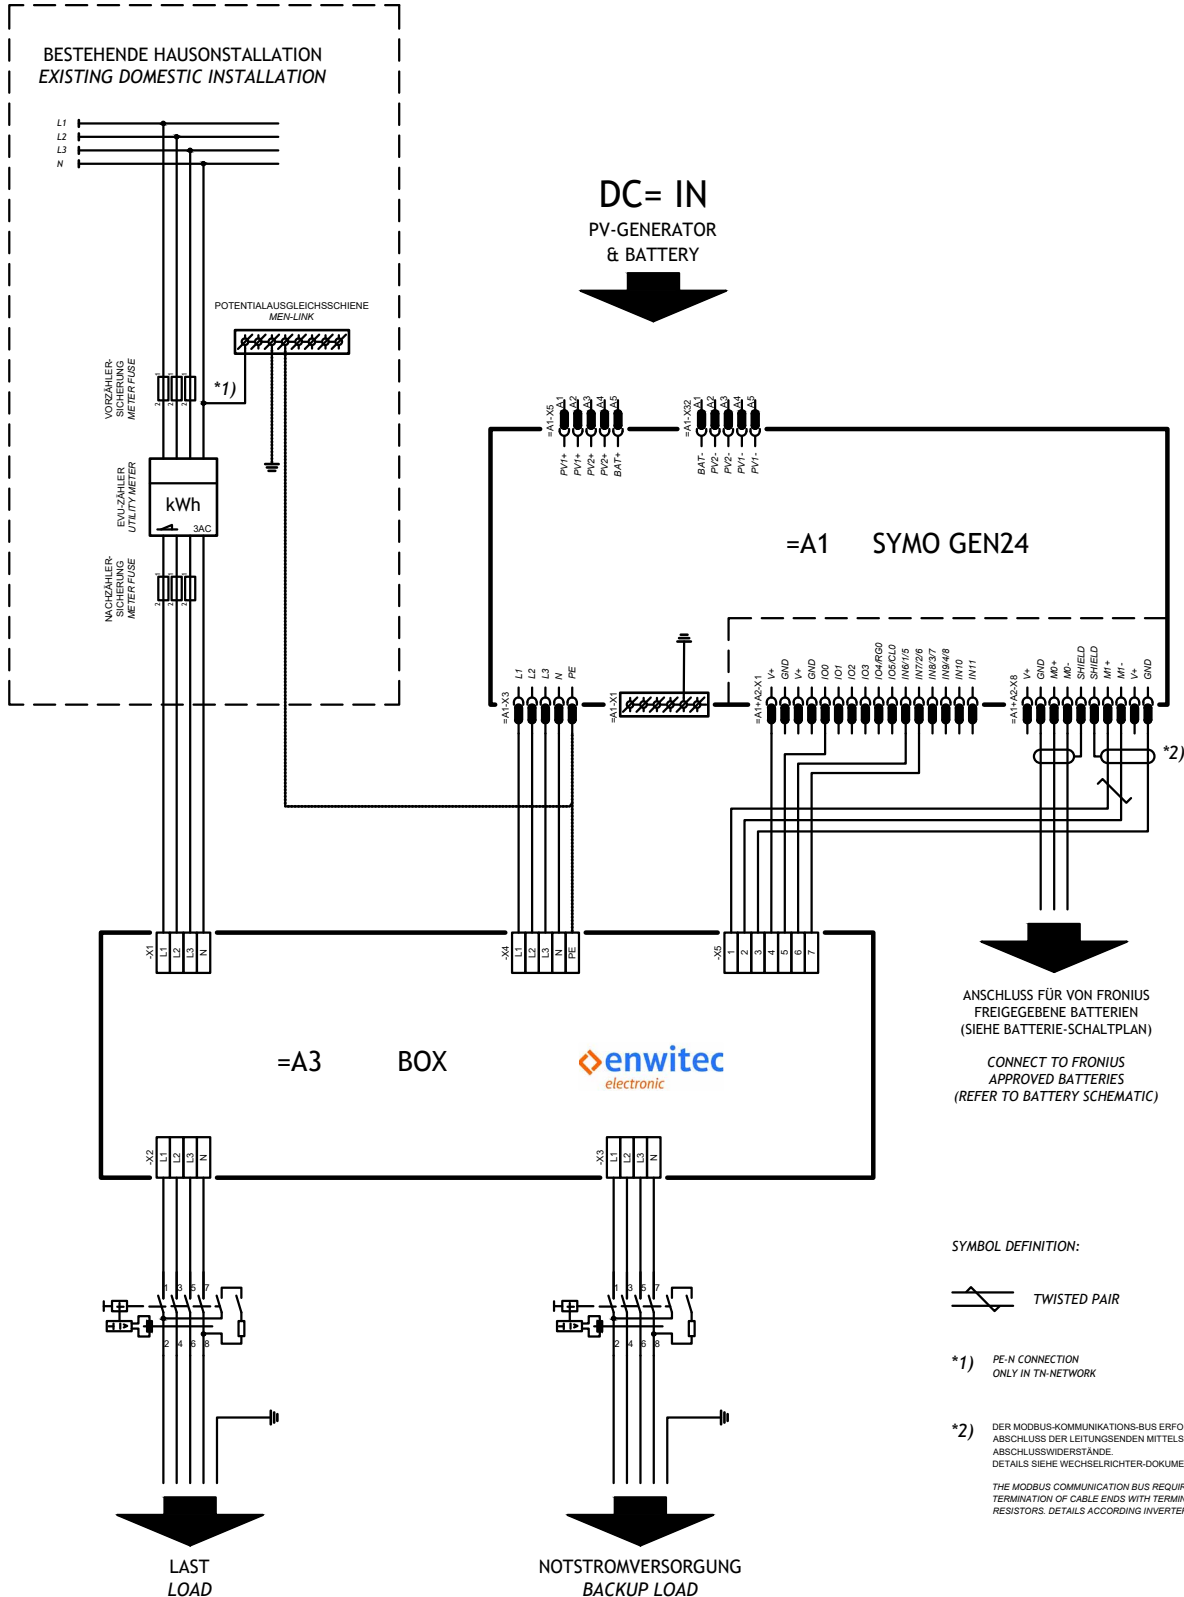

INTERNAL CIRCUITRY

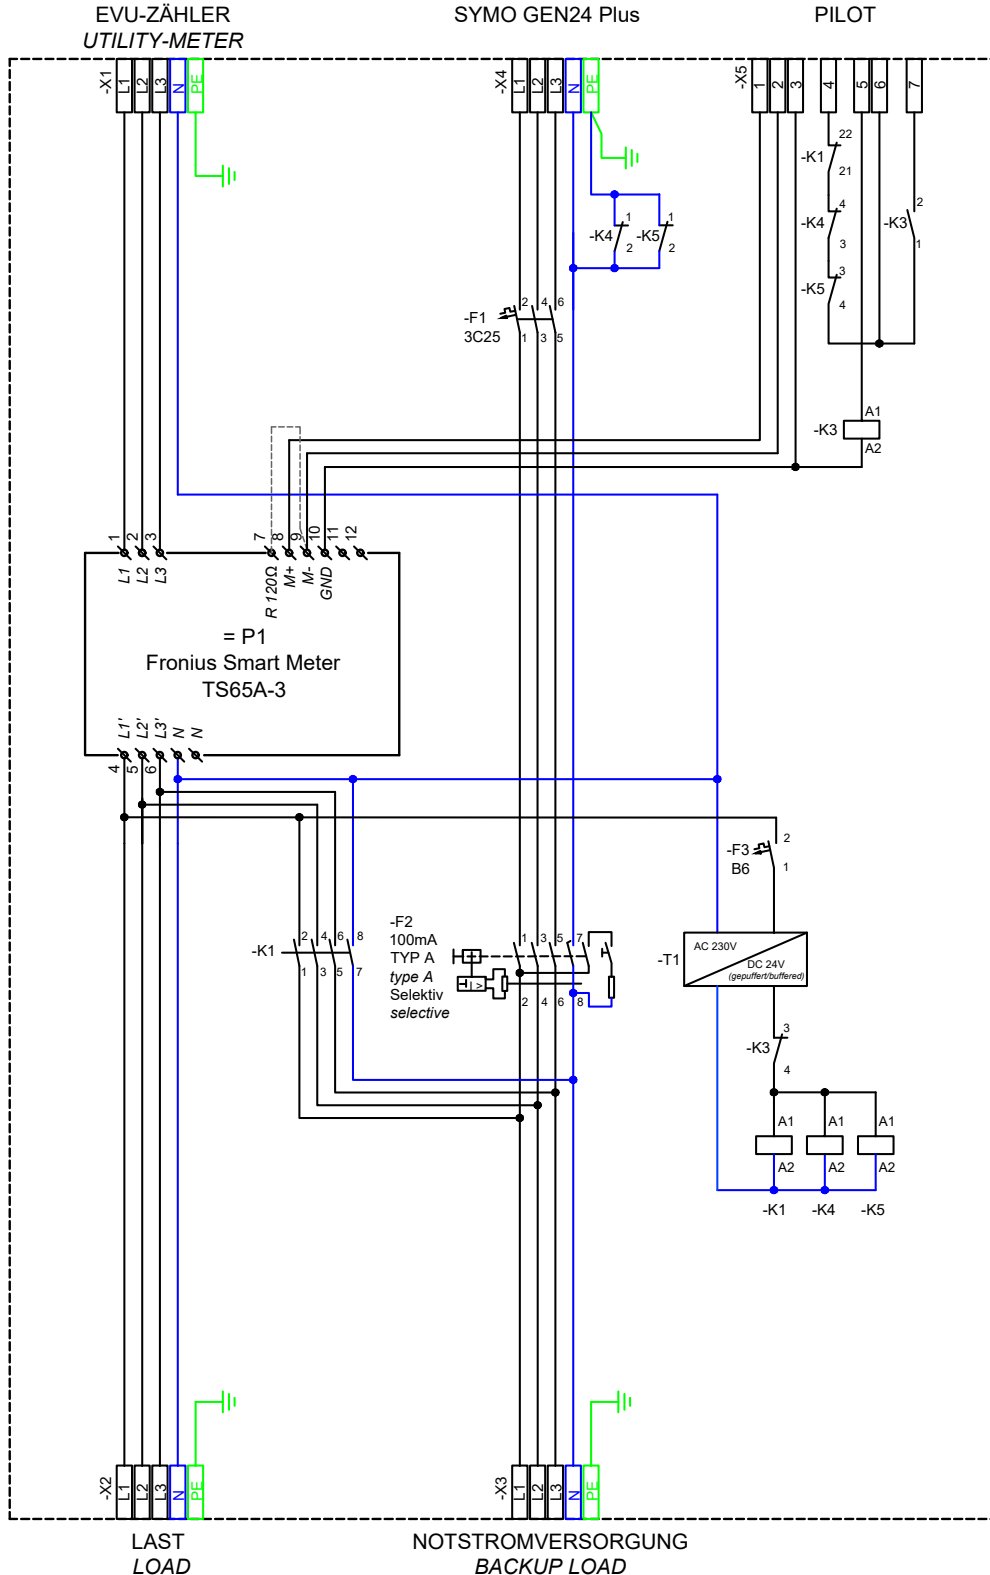


Art.Nr. 10017349

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmansquick
Mail info@enwitec.eu
www.enwitec.eu

CABLE ENTRY

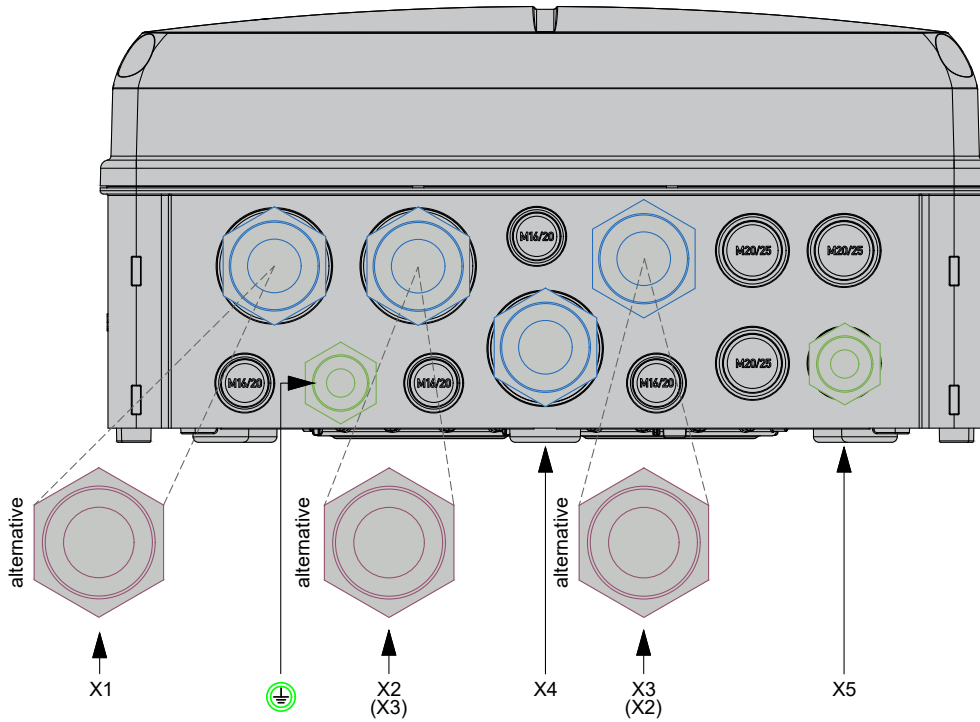

Cable gland	Terminal block	Clamping range [mm]	Wire type	Cross section [mm ²]	Stripping length [mm]
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #0070C0; border: 1px solid black;"></div> M32 <div style="width: 10px; height: 10px; background-color: #800040; border: 1px solid black;"></div> M40 </div>	X1 – Grid	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #0070C0; border: 1px solid black;"></div> M32 <div style="width: 10px; height: 10px; background-color: #800040; border: 1px solid black;"></div> M40 </div>	X2 – Load „Standard“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #0070C0; border: 1px solid black;"></div> M32 <div style="width: 10px; height: 10px; background-color: #800040; border: 1px solid black;"></div> M40 </div>	X3 – Load „Backup“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #0070C0; border: 1px solid black;"></div> M32 </div>	X4 – Symo GEN24 Plus	19 - 25	solid /stranded fine stranded fine stranded + wire end ferrule	10 10 6	13 - 15
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #70AD47; border: 1px solid black;"></div> M20 </div>	X5 – Data cable	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	2,5 2,5 1,5	10 - 12
<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #70AD47; border: 1px solid black;"></div> M20 </div>	PE – equipotential bonding rail	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20

Art.Nr. 10017349

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmannsquick
Mail info@enwitec.eu
www.enwitec.eu

GENERAL DATA

NOMINAL VALUES			• applicable / - not applicable
Rated voltage		[V]	3PH - 230/400
Rated insulation voltage		[V]	400
Operating frequency		[Hz]	50/60 +/- 5%
Max. prospective* short circuit current		[kA]	10
Permitted grid structure			TT ⁺⁺ /TN-S
Grid disconnection			all-pole
Max. grid-side pickup fuse (gL/gG)		[A]	63
Max. thermal throughput power	ta = 40°C ta = 25°C	[kW]	20 30#
Standby-loss, ca.		[W]	10

CIRCUIT BREAKERS

F1	Symo GEN24 Plus	MCB [A]	3C25
F2	Symo GEN24 Plus	RCD [A]	type A - selective 63/0,1
F3	Power supply T1	MCB [A]	B6

CONTACTORS (IEC/EN 61095; IEC/EN60947-1; IEC 60947-5-1)

K1	Grid disconnection	AC1 [A]	63
K4/K5	Earthing device	AC1 [A]	25
K3	Communication	AC1 [A]	20
K1/K4/K5	Control voltage	[VDC]	24
K3	Control voltage	[VDC]	12
Hum-free		•/-	•

ENERGY METER

Manufacturer		Fronius
Type		TS65A-3

FRT (Fault ride through) support

Buffered power supply		[VDC]	24
-----------------------	--	-------	----

* Is the maximum, unaffected continuous short-circuit current of the mains connection.

When operating the switchover box with 30KW max. thermal throughput power, the use of 2 x ventilation valves is required (diagonal air flow – positioning bottom left and top right e.g.; knockouts are available)
Protection class is being reduced to IP44.

** Only in consultation with grid operator!

Art.Nr. 10017349

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
 Scherrwies 2 | 84329 Wurmanssquick
 Mail info@enwitec.eu
www.enwitec.eu

TECNICAL DATA

GENERAL DATA			• zutreffend / - nicht zutreffend
Dimensions W x H x D (without cable glands)		[mm]	315 x 600 x 155
Weight, ca.		[kg]	11
Operating temperature range t _a		[°C]	-5...+40
Temperature - transport/storage (24 h. 70°C)		[°C]	-25...+55
Humidity - condensing allowed		•/-	-
Humidity - permitted range		[%]	5...95
Max. altitude above sea level N.N.		[m]	2000
Protection class IP (EN 60529)	ta = 40°C ta = 25°C	IP	65 44#
outdoor-application permitted		•/-	-
Installation type			indoor
Protection against electric shock (EN 61140)			II
Case material			polycarbonate
RoHS-conformity (2011/65/EU)		•/-	•
Case colour			similar RAL 7035
Cover			transparent
Mounting method			wall mounting
Locking system			without tool

MISCELLANEOUS

Customs tariff number	85371098
-----------------------	----------

ACCESSORY (not included in scope of delivery)

# Set of ventilation valves – order number	10017652 (enwitec)
Consisting of:	
2 x Ventilation valve – order number	036579 (LeGrand)
2 x Reduction adaptor	M40/M32
2 x Locknut	M40

When operating the switchover box with 30KW max. thermal throughput power, the use of 2 x ventilation valves is required (diagonal air flow – positioning bottom left and top right e.g.; knockouts are available)
 Protection class is being reduced to IP44.

Art.Nr. 10017349

SWITCHOVER BOX - Fronius SYMO GEN24 Plus - „Full Backup“ | 3PH_FRO_BBDAP_20KW_3PH_FRT

enwitec electronic GmbH
Scherrwies 2 | 84329 Wurmanssquick
Mail info@enwitec.eu
www.enwitec.eu

EC DECLARATION OF CONFORMITY

The product, designation: **3PH_FRO_BBDAP_20KW_3PH_FRT**

article number: **10017349**

manufacturer: **enwitec electronic GmbH
Scherrwies 2
84329 Rogglfing**

description: **Switchover Box for Fronius system Symo GEN24 Plus - „Full Backup“**

to which this declaration relates, is in conformity to the following standards or normative documents:

EN 61439-1	Low-voltage switchgear and controlgear assemblies
EN 61439-2	Power switchgear and controlgear assemblies
EN 61439-3	Distribution boards intended to be operated by Ordinary persons (DBO)

and is in accordance with the provisions of the following EC-directives:

Low-voltage directive 2014/35/EU

Restriction of Hazardous Substances Directive 2011/65/EU (RoHS)

Year of affixing CE-marking: **2023**

Date of issue: **21.06.2023**

enwitec electronic GmbH



Name / Signature

Johann Wimmer
CEO