

DATA SHEET

Battery fuse protection

enwitec article no.	10014855
Customer article no.	
Designation	enwitec BAT BREAKER-VCT-Charger-6x200A-Accu-10x200A 4x100A-1x10A
Application	Battery fuse "BAT BREAKER" for the PV energy storage system with battery charger / inverter/ Charge controller/ Color control
Number and type of battery charger / inverter:	max. 6 Victron Quattro (Note battery voltages with the associated charging currents)
Number and type of energy storage:	max. 10x manufacturer independent (note charging currents and voltages)
Number and type of Charge controller:	max. 4x manufacturer independent
Number and type of color control:	max. 1x manufacturer independent
General note:	The planned components must be checked by the customer against the data sheet of this battery fuse. Enwitec does not assume any design responsibility. Cable lugs are not included.


Min. construction distances:

Up and down min.:
300 mm

Left and right min.:
200 mm

forward min.:
800 mm

Cable clamping:
Must be done on site!

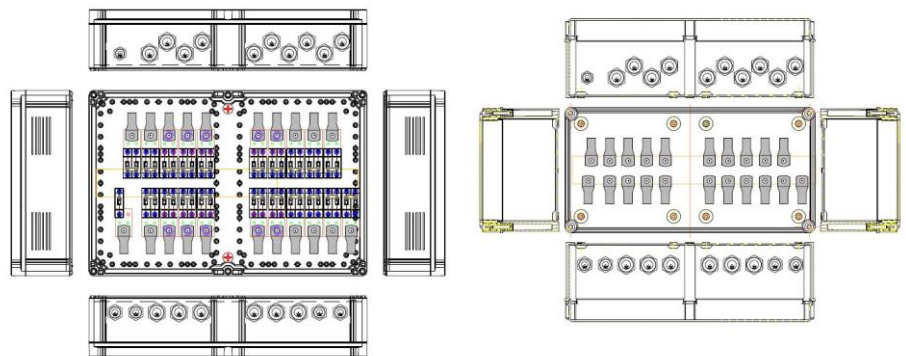

Delivery

Designation	Article no.	Piece	Comments
Cable gland M32x1,5	10000739	32	
Locknut M32x1,5	10000724	32	
Cable gland M20x1,5	10000737	2	
Locknut M20x1,5	10000722	2	
Cable gland M25x1,5	10000738	8	
Locknut M25x1,5	10000723	8	

