


Preliminary Data sheet

DC - generator junction box

enwitec-order-number	10013263
customer-article-number	
type designation	GAK-enwitec-S-1000-6x2R-X-BC-PC-1.0

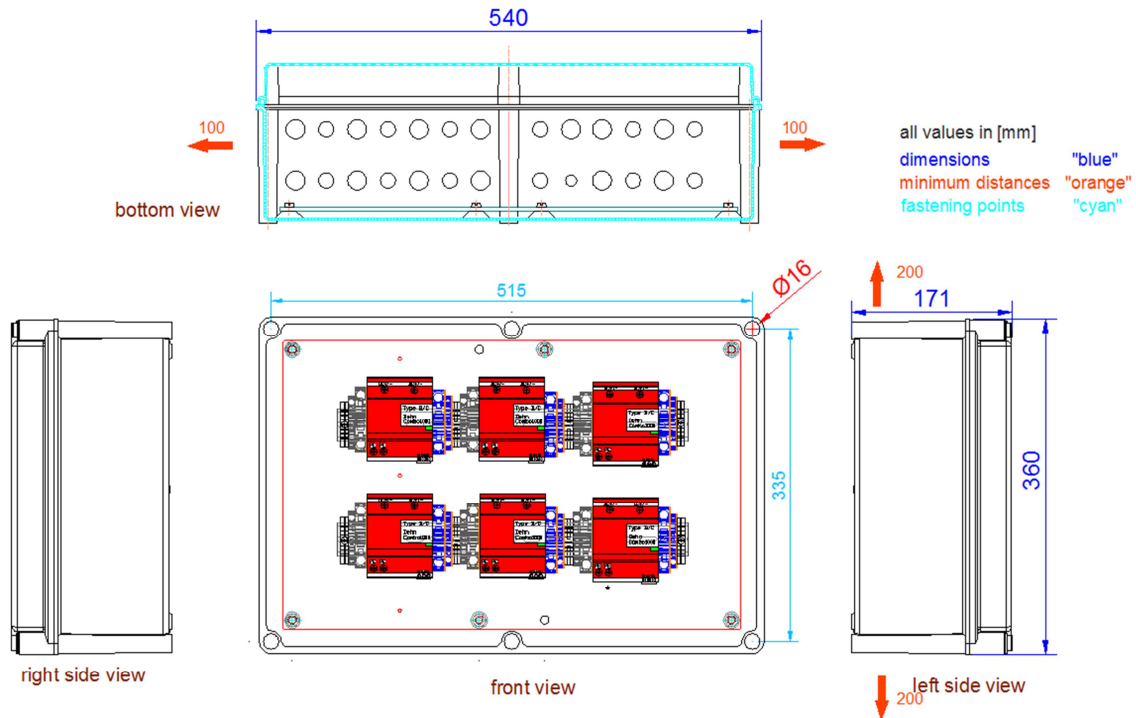

scope of delivery

description	order-nr.	pcs	comment
general installation instructions for GAK	10011928	1	
Cable Gland M20x1.5	10000737	13	
Locknut M20x1.5	10000722	13	
Cable Gland M16x1.5	10000736	12	
Locknut M16x1.5	10000721	12	
Pressure compensation element	10001971	1	
Locknut M12x1.5	10001476	1	
Blind plug BS 10	10010584	6	for unused M16 cable glands

Preliminary Data sheet

DC - generator junction box

technical specification

rated insulation voltage U_i	[VDC]	1000		
number of isolated MPP-input(s)	[n]	1/2	3/4	5/6
rated operating voltage U_e	[VDC]	1000	1000	1000
rated operating current I_{nA}	[ADC]	20	20	20
max. number of PV-strings	[n]	2	2	2
rated operating current per string I_{nc}	[ADC]	10	10	10
string fuse in the "+" potential	•/-	-	-	-
string fuse in the "-" potential	•/-	-	-	-
fuse is inserted at factory setting	•/-	-	-	-
rated current value at factory setting	[A]	-	-	-

surge protective device (SPD)

test category acc. EN 61643-11 (type)		1+2
max. continuous operating voltage U_{cpv}	[VDC]	1000
only type 1: impulse current max. I_{imp} 10/350 [kA]		6.25 per pole

input (for pv-generator)

cable entry

cable glands (EN 50262)	•/-	•
clamping range	[Ømm]	24x 5-6.5
PV-connectors	•/-	-
PV-connectors - manufacturer/type-designation		-

terminals

"+" potential / "-" potential		+plus	-minus
screw terminal/spring clamp		Spring	Spring
insulation stripping length	[mm]	13...15	13...15
tightening torque	[Nm]	-	-
appropriate conductor material	Al/Cu	Cu	Cu

wire cross section

Cu-finely stranded with end sleeve	[mm ²]	From 1.5	From 1.5
Cu-finely stranded without end sleeve	[mm ²]	0.5-10	0.5-10
Cu-solid or stranded	[mm ²]	1-10	1-10

output (for pv-inverter)

cable entry

cable glands (EN 50262)	•/-	•
clamping range	[Ømm]	12x 4.5-10
PV-connectors	•/-	-
PV-connectors - manufacturer/type-designation		-

terminals

screw terminal/spring clamp		Spring
insulation stripping length	[mm]	18...20
tightening torque	[Nm]	-
appropriate conductor material	Al/Cu	Cu

wire cross section

Cu-finely stranded with end sleeve	[mm ²]	From 2.5
Cu-finely stranded without end sleeve	[mm ²]	0.5...25
Cu-solid or stranded	[mm ²]	0.5...16
Alu - round, solid	[mm ²]	-
Alu - round, stranded	[mm ²]	-
Alu - sector, solid	[mm ²]	-
Alu - sector, stranded	[mm ²]	-

connection to ground

cable entry

cable glands (EN 50262)	•/-	•
clamping range	[Ømm]	6-13

terminals

screw terminal/spring clamp		Screw
Min. insulation stripping length	[mm]	12
tightening torque	[Nm]	4
appropriate conductor material	Al/Cu	Cu

wire cross section

Cu-finely stranded with end sleeve	[mm ²]	Max. 25
Cu-finely stranded without end sleeve	[mm ²]	-
Cu-solid or stranded	[mm ²]	Max. 25
Alu - round, solid	[mm ²]	-
Alu - round, stranded	[mm ²]	-
Alu - sector, solid	[mm ²]	-
Alu - sector, stranded	[mm ²]	-

Preliminary Data sheet

DC - generator junction box

general data

dimensions (WxHxD)	[mm]	540x360x171
weight	[kg]	-
operating temperature range	[°C]	-25°C - + 35
derating above temperature	[°C]	-
transport + storage temperature	[°C]	-25°C - + 35
humidity - condensing permitted	•/-	•
humidity within the range of	[%]	5...95
max. altitude above sea level NN	[m]	2000
protection class IP	(EN 60529)	65
outdoor-application permitted	•/-	-
exposure to <u>direct</u> weathering	•/-	-
protection against electric shock (EN 61140)		II
cabinet material		PC Polycarbonate
RoHS-conformity (2011/65/EU)	•/-	•
colour of cabinet		similar to RAL7035
way of mounting		wall mounting
quantity of expanded clay (only ground mounting)	[l]	-
locking system		Tranwsparent cover

relevant standards

switching devices	EN 61439-1 EN 61439-2
surge/overvoltage protection	DIN EN 62305-3 supplementary sheet 5
PV power supply systems	DIN IEC 60364-7-712

miscellaneous

customs tariff number	85371098

spare parts

	order-nr.
Dehn-DG YPV SCI 1000 Compact Class I-II	10010504